


Geotech SS Geosub

The Geotech SS Geosub is an extremely versatile single stage pump for 2" or larger wells. It samples from depths down to 200 ft. It can be used to purge and sample wells using the AC powered controller to adjust flow rates. Low flow sampling rates as low as 10 mL/ min can be achieved. This pump comes mounted on a reel for portable use. Rice Rentals also supplies generators to operate this product.

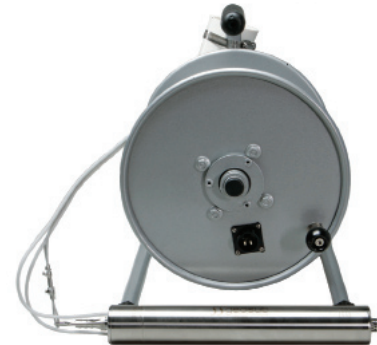

Features

- Fits down a 2" monitoring well
- Most versatile pump in the industry, sample from depths of 200 feet
- Low flow sampling rates to 10 ml/min using the Geotech AC Controller
- User enabled dry-run protection
- Easy to decontaminate
- Field replaceable motor lead kits available
- Portable reel system allows user to easily moves pump from well to well

Specifications

Electric

- Full Load Rating: 2/3 HP
- Maximum Amp Draw: 35 amps
- Overload: Incorporated into controller

Discharge Port Connection

- 1/4" female npt (includes 3/8" barb)

Operating Conditions

- Min. Ambient Fluid Temperature: 34°F (1°C)
- Max. Ambient Fluid Temperature: 80°F (28°C)

Dimensions & Weight (pump & motor)

- Dimensions of Pump: 12.2" L x 1.75" OD
- Net Weight of Portable Pump Unit (24.9 lbs)

Cable Specifications

Material

- Two 12 gauge conductors with Tefzel® jacket, and integrated safety cable

Accessories

- Honda 2000w Generator
- Hose Clamps
- Applicable Tubing
- Nitrile Gloves